



◆ Main Specifications

Working Voltage	24 (V DC)
DC Resistance	10 (Ω)
External Resistance	1.5 (Ω) <6 (W) or more>
Duty Cycle	8 (%) or less
Max ON Time	50 (msec)
Coil Saturation Temperature Rise $\Delta\theta_s$ (at 20°C)	$\Delta\theta_s \div 17 \times W$ (°C) $K \div 17$ (°C/watt)
Temperature Rise Time Constant τ	4.5 (minutes)
Heat-Resistant Class	Class E (120°C)
Insulation Resistance	500 V DC MEGA, 100 M Ω or more
Dielectric Strength	1000 V AC, 50/60 Hz, 1 minute
Mass	45 (g)
Non-Excited Holding Force	3 (N) or more
Response Speed ^{*1}	9 (msec)


*1: measurement conditions: measured by Takano Co. in a standard testing environment, with no load, shaft in a horizontal position, applied voltage 24 V DC.



◆ Attractive Force Data

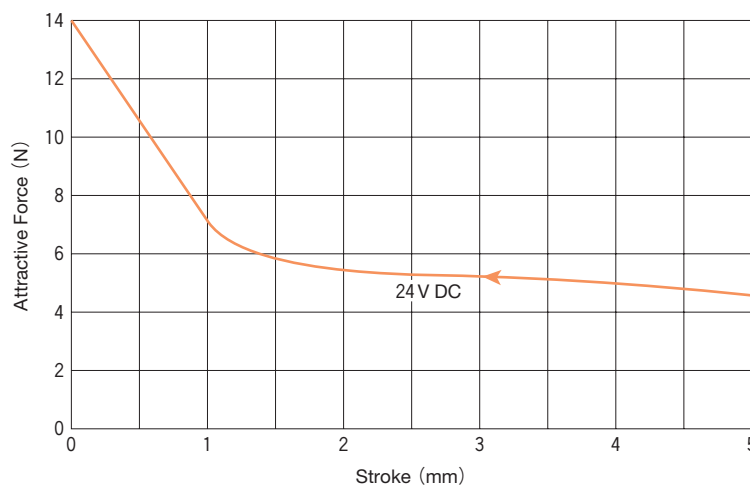

◆ External Dimensions (mm)

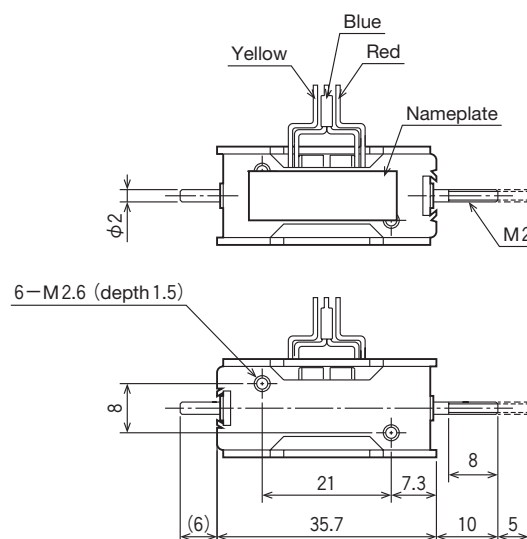

Terminal Specifications

Lead Wire Length (mm) : 200
AWG Size : 26