



◆ Main Specifications

Aperture Size	8×8 (mm)
Shutter Plate Material	PET Anti-Reflection Treatment
Drive Voltage	5.0 (V DC) ±10 (%)
Resistance Value	40 (Ω) ±10% at 25 (°C)
Duty Cycle	25 (%) or less
Input Valve Width	50 ~ 500 (msec)
Heat-Resistant Class	Class Y (90 °C)
Response Time	50 (msec) or less
Environmental Conditions	-10 ~ 50 (°C) 10 ~ 85 (%)
Storing Environment	-20 ~ 70 (°C) 10 ~ 85 (%)
Life Cycle/Durability	100,000 (cycles) 1 cycle of opening and closing



◆ External Dimensions (mm)

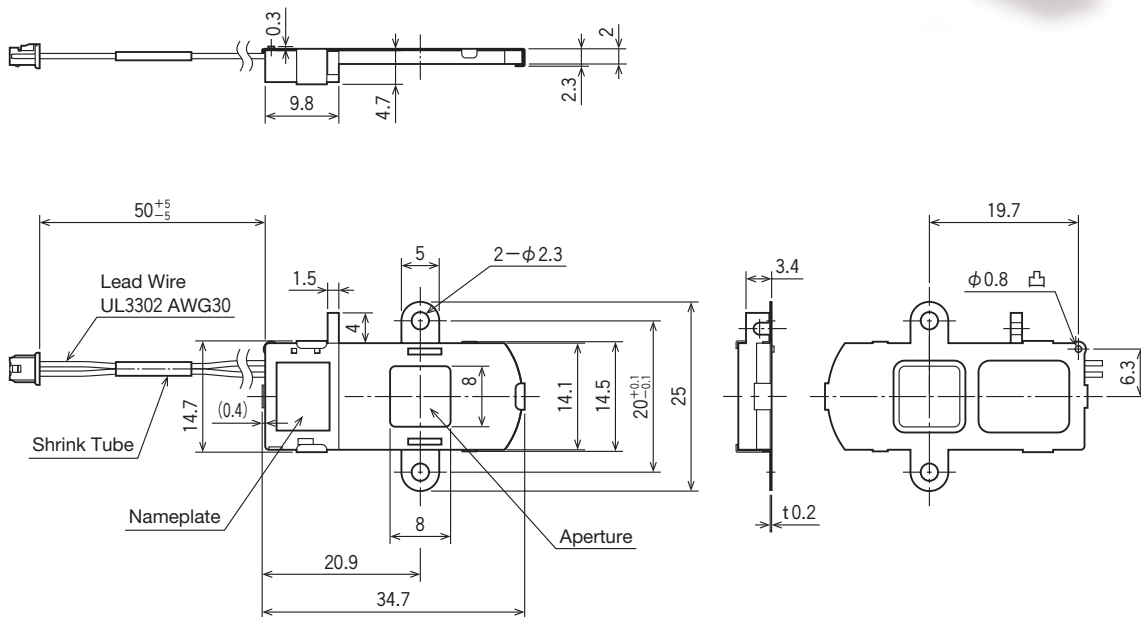

	Pin 1 Black	Pin 2 Red	Shutter Operation
Polarity	(+)	(-)	Open
	(-)	(+)	Close