


RSR20/40-CAB0-N036

主要参数表/Dimensions

直流电阻 DC resistance	36 (Ω)
电磁感应 Inductance (φ=0°)	102 (mH)
使用饱和温升值 Δθs(at20℃) Saturation temperature rising rate of coil	Δθs≐6.5XW(℃) K≐6.5(℃/watt)
线圈的饱和温升 Time constant of temperature rise	8 (分/Minutes)
耐热等级 Heat resistance class	ClassE (120℃)
绝缘阻抗 Insulation resistance	DC500Vメガー、100MΩ以上 DC500V MEGA, Over 100MΩ
绝缘强度 Dielectric strength	AC1000V、50/60Hz、1 (分/Minutes)
惯性扭矩 Moment of inertia	36 (g·cm ²)
重量 Mass	500 (g)




外形尺寸图/Outside dimension

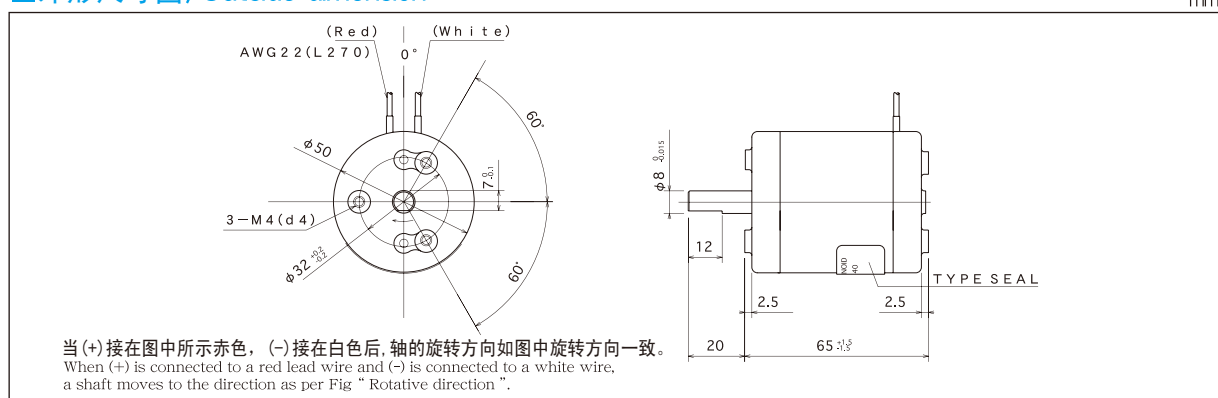

扭矩特性图

Torque characteristics

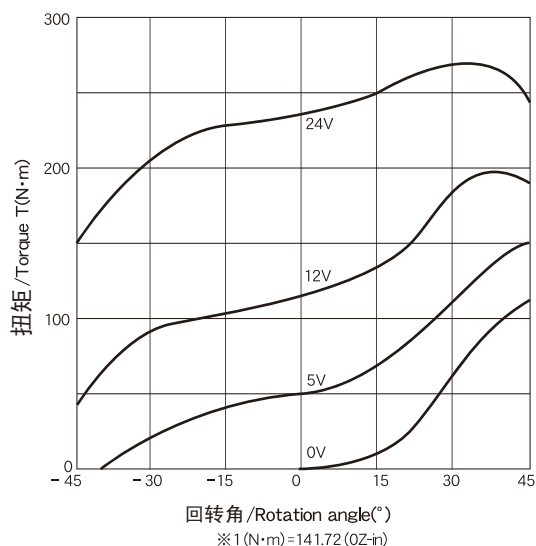

响应特性图(无负载, 水平状态)

Response characteristics (No-load, horizontally placed)

