

RSR28/17-SRシリーズ (復帰バネ付) -SLシリーズ Return spring type

■ 主要参数表/Dimensions

定格电压 Rated voltage	DC12 (V)	DC24 (V)
直流电阻 DC resistance	27.5 (Ω)	110 (Ω)
电磁感应 Inductance (φ=0°)	8 (mH)	30 (mH)
运转方向 Rotation direction	SR通电時 CW / SL通电時 CCW (when applying current)	
动作角度 Operating angle	25°/35°/45°	
使用饱合温升值 Δθs(at20°C) Saturation temperature rising rate of coil	Δθs≒17XW (°C) K≒17 (°C/watt)	
线圈的饱合温升 Time constant of temperature rise	5 (分/Minutes)	
耐热等级 Heat resistance class	ClassE (120°C)	
绝缘电阻 Insulation resistance	DC500Vメガ、100MΩ以上 DC500V MEGA, Over 100MΩ	
绝缘强度 Dielectric strength	AC1000V, 50/60Hz, 1 (分/Minutes)	
惯性扭矩 Moment of inertia	1.8 (g·cm ²)	
重量 Mass	50 (g)	



■ 型式例


Type example

RSR28/17-SR45-27.5

① ② ③


- ① 回转方向 (SR: CW, SL: CCW)
② 动作角度 (25°, 35°, 45°)
③ 电阻值 (27.5 (Ω), 110 (Ω))

■ 外形尺寸图/Outside dimension

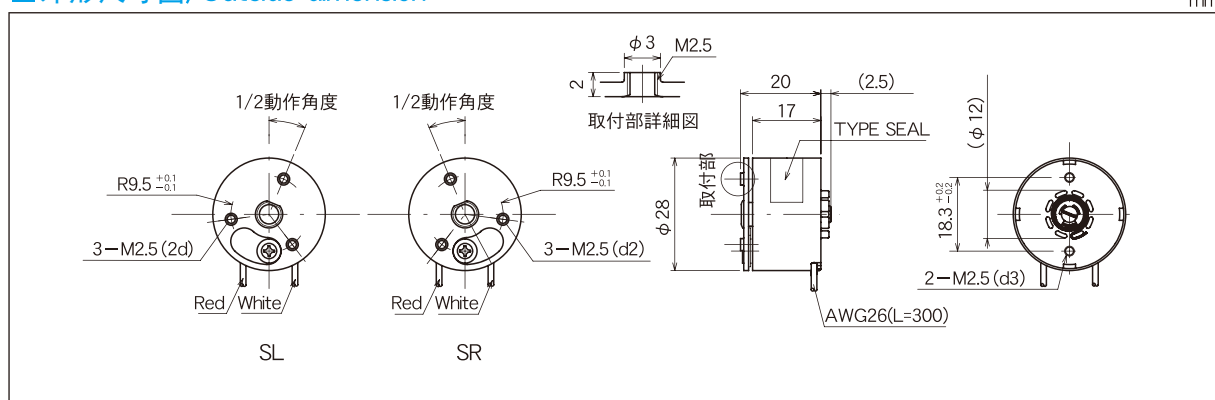


■ 扭矩特性图 (SR45)

Torque characteristics

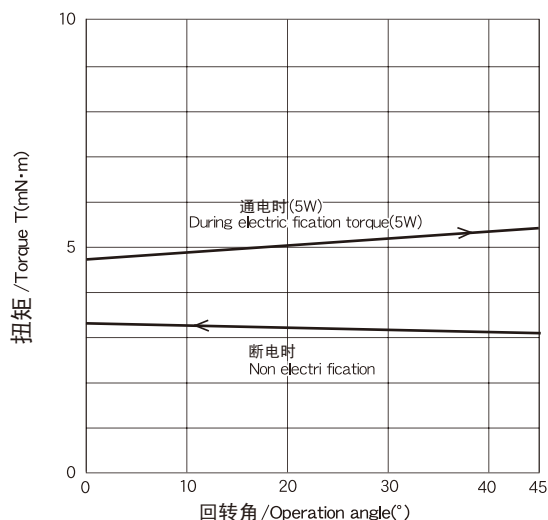

■ 响应特性图 (无负载, 水平状态)

Response characteristics (No-load, horizontally placed)

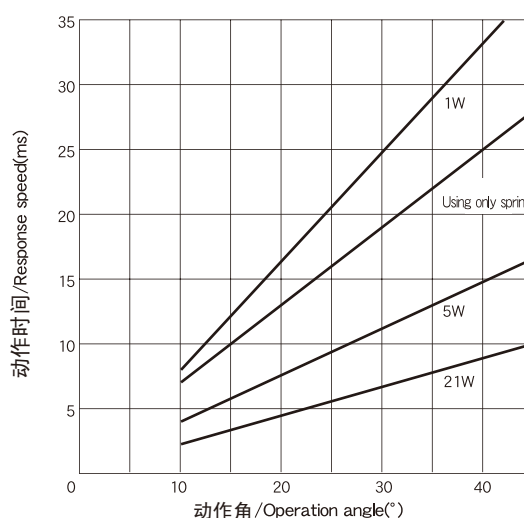

※ 1 (N·m) = 141.72 (OZ·in)