



RSS20/20-T008

■ 主要参数表/Dimensions

动作角度 Operating angle	30°step and 60°step
额定电压 Rated voltage	DC12(V)
无励磁保持力矩 Non exciting holding power	0.025(N·m)
耐磁保持力矩 Exciting holding power	0.088(N·m) :at.18V、±10°
直流电阻 DC resistance	8(Ω) :at20(°C) 相间 8(Ω) :at20(°C) correlation
电磁感应 Inductance(φ=0°)	10mH (参考值、相间) 10mH (Reference value,correlation)
使用饱和温升值 Δθs(at20°C) Saturation temperature rising rate of coil	Δθs≐6.5XW(°C) K≐6.5(°C/watt)
耐热级数 Heat resistance class	ClassE (120°C)
绝缘阻抗 Insulation resistance	DC500Vメガ、100MΩ以上 DC500V MEGA, Over100MΩ
绝缘强度 Dielectric strength	AC1000V、50/60Hz、1(分/Minutes)
惯性扭矩 Moment of inertia	20(g·cm ²)
重量 Mass	350(g)




■ 外形尺寸图/Outside dimension

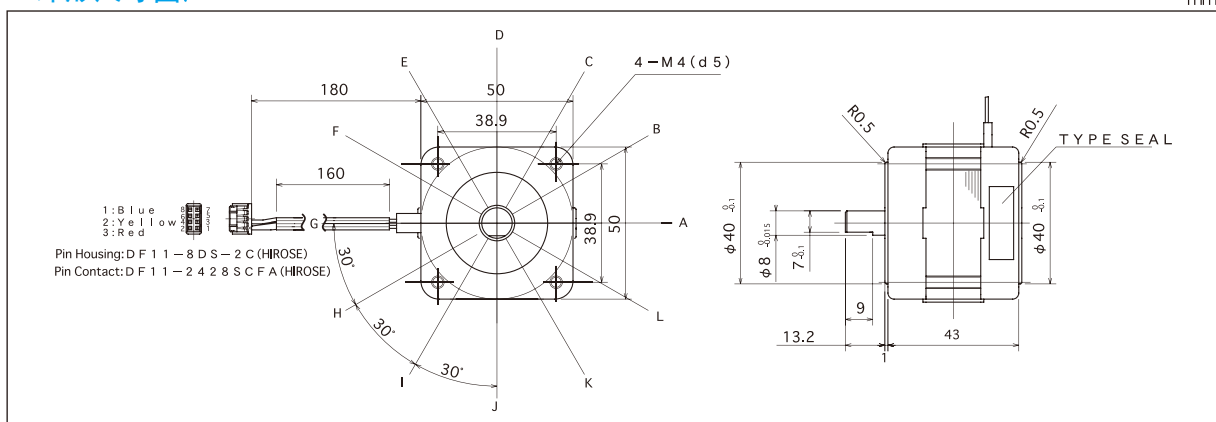

■ 扭矩特性图

Torque characteristics

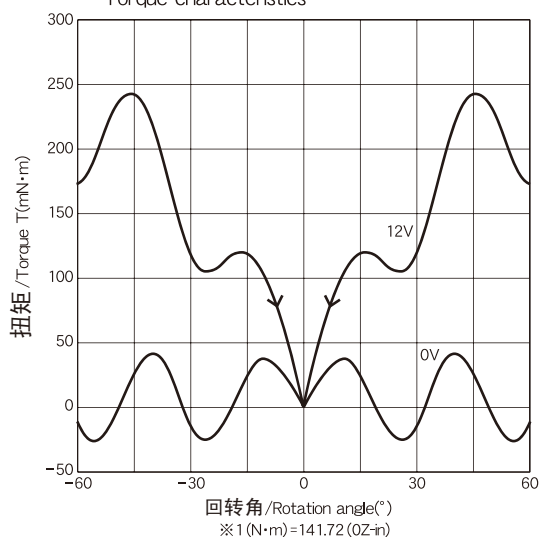

■ 驱动系统和工作模式

Drive system and operation pattern

30° 步进
30° Step

0:開放
0:Free

位置 Position	接線顏色 Lead Wire Color	Red	Yellow	Blue
A		(+)	(-)	0
B		(+)	0	(-)
C		0	(+)	(-)
D		(-)	(+)	0
E		(-)	0	(+)
F		0	(-)	(+)
G		(+)	(-)	0
H		(+)	0	(-)
I		0	(+)	(-)
J		(-)	(+)	0
K		(-)	0	(+)
L		0	(-)	(+)

60° 步进
60° Step

0:開放
0:Free

位置 Position	接線顏色 Lead Wire Color	Red	Yellow	Blue
A		(+)	(-)	0
C		0	(+)	(-)
E		(-)	0	(+)
G		(+)	(-)	0
I		0	(+)	(-)
K		(-)	0	(+)